

KEL-SNAP | □□□ □□□

□□□ □□□ □□□□ □□ □□ □□-□ □□□□ □□ / IP54 / UL Type 12



KEL-SNAP □□□□ □□□□ KEL □□□□ □□□ □□□ □□□□□□.

□□□□ □□ □□ □ KEL-SNAP□ □□□ □□□□, □□□□□□ □□□□ □□□ KEL-□□□□□ SNAP □□□□ □□ □□ □□□□□□

□□(Cut-out) □□□□ 36mm□ 46mm □□ □□ □□□□□□.

IP54	UL TYPE 12	C US	HL3 EN 45545-2	EN 61373	ECOLAB certified
RoHS compliant	REACH COMPLIANCE	Made in Germany			


IP □□□□ (EN 60529)	IP54
UL Type (UL 50E)	UL Type 12
	□□□□□□
	UL94-V0, □□□□□□
	-40 C° to 140 C°
	□□□□ □□, □□□□□□
□□ □□	□□ □□□□
□□ □□	38 mm

□□ □ □□

- KEL □□□□ □□□□ □□ □□ □□ □ □□ □□□
- KEL □□□□ □□□ □□□ □□□(KEL-SNAP-B □□)
- □□□□ □□
- □□ □□□ KEL-□□□□□ □□ □□□ □□


□□ □□ □ □□

KEL-SNAP 24

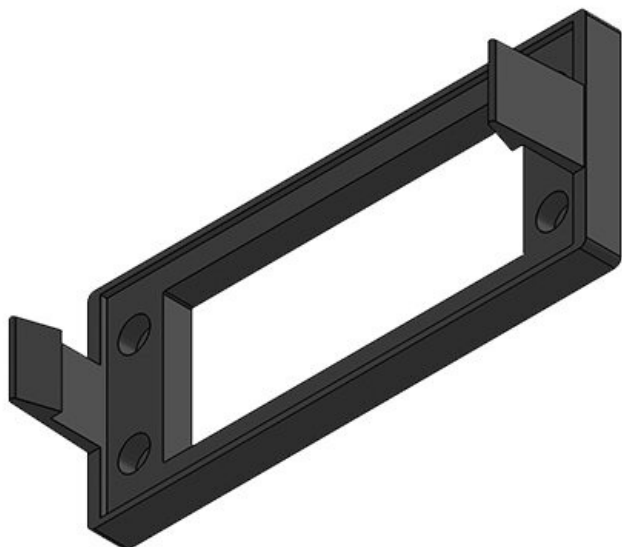


EAN	42042	□□ □□	4
	4251269307	□□□ □□	5,5 mm
	652	□□ :	KEL 24, KEL-U 24, KEL-QUICK 24, KEL-FA 24, KEL-FG-A
	10		
	155 mm		
	64 mm		
	38 mm		
□□ □□	38 mm		

KEL-SNAP 24-E

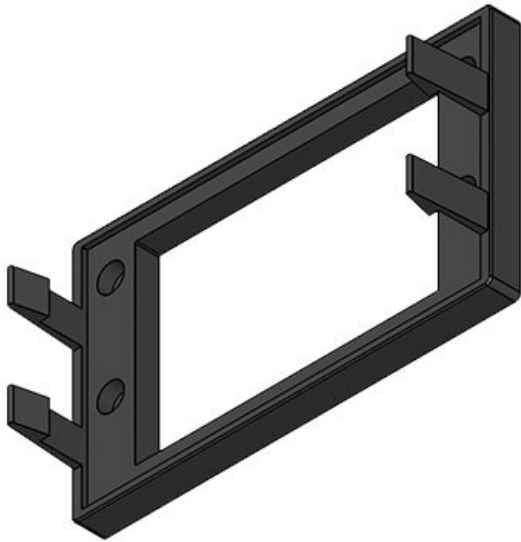


	42044	□□ □□	4
EAN	4251269307	□□□ □□	5,5 mm
	669	□□ :	KEL 24-E
	1		
	155 mm		
	89 mm		
	38 mm		
□□ □□	38 mm		

KEL-SNAP 24-MT

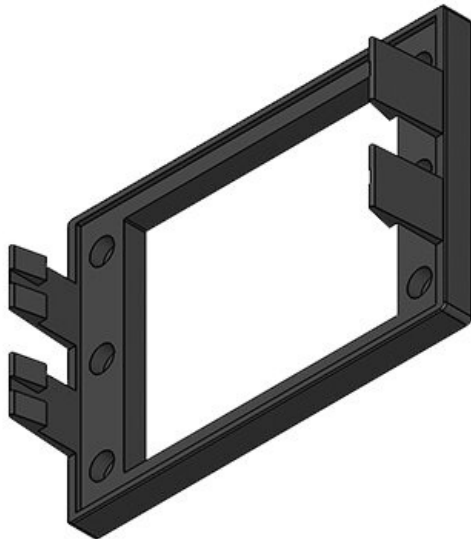


	42046	□□ □□	6
EAN	4251269307	□□□ □□	5,5 mm
	676	□□ :	KEL 24-MT
	1		
	155 mm		
	108 mm		
	38 mm		
□□ □□	38 mm		

KEL-SNAP 16

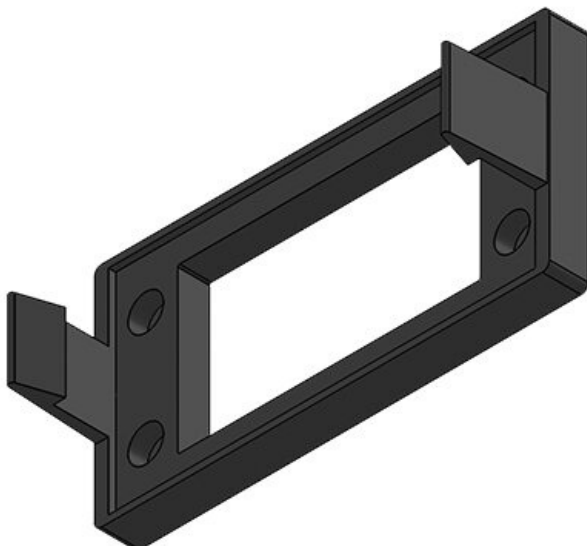

	42040	□□ □□	4
EAN	4251269307	□□□ □□	5,5 mm
	645	□□ :	KEL 16, KEL-
	10		U 16, KEL-FA
	128 mm		16, KEL-
	64 mm		QUICK 16
	38 mm		
□□ □□	38 mm		


KEL-SNAP 10

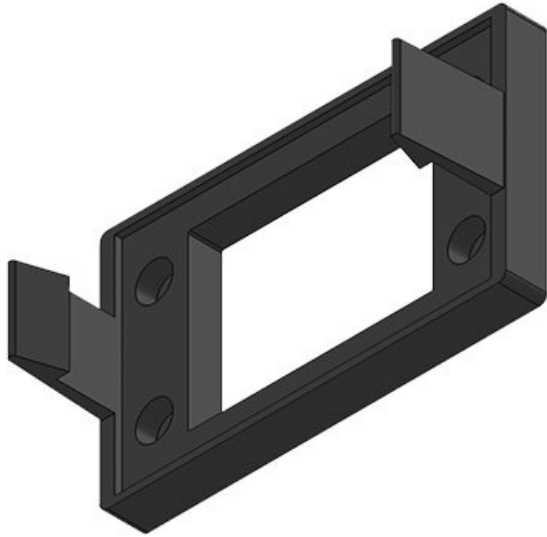

EAN 42039 00 00
4251269307 000 00
638 00 :
10
108 mm
64 mm
38 mm
38 mm

4
5,5 mm
KEL 10, KEL-
U 10, KEL-FA
10, KEL-
QUICK 10


KEL-SNAP-B

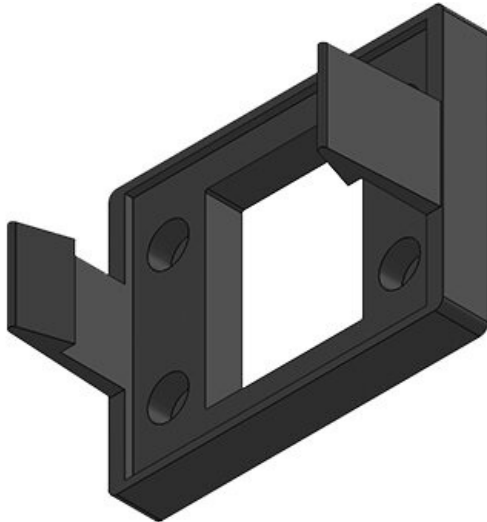

EAN 42038 00 00
4251269307 000 00
621 00 :
10
81 mm
64 mm
38 mm
38 mm

4
5,5 mm
KEL-B, KEL-
U-B, KEL-
QUICK-B


KEL-SNAP-S 24

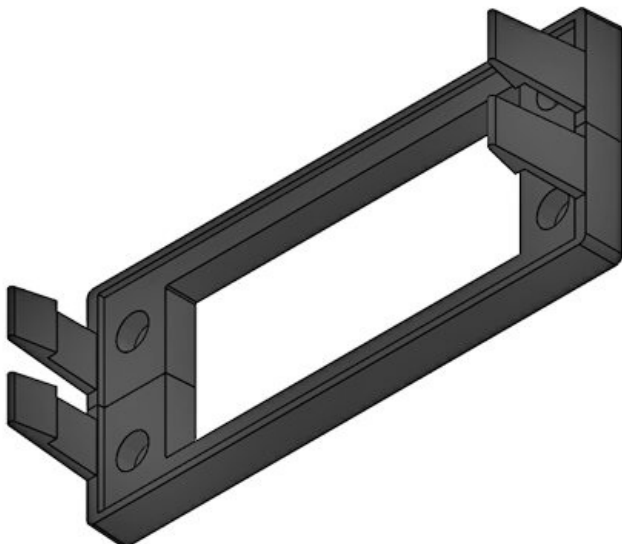

EAN 42060 00 00
4251269323 000 00
720 00 :
10
155 mm
64 mm
38 mm
38 mm

4
5,5 mm
KEL 24, KEL-
U 24, KEL-
QUICK 24,
KEL-FA 24,
KEL-FG-A


KEL-SNAP-S 16

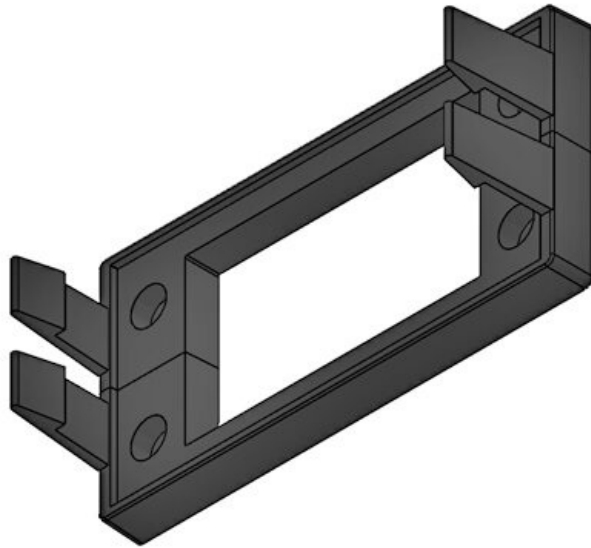

EAN 42061 4251269323 737 10 128 mm 64 mm 38 mm 38 mm

4 5,5 mm KEL 16, KEL-U 16, KEL-FA 16, KEL-QUICK 16


KEL-SNAP-S 10

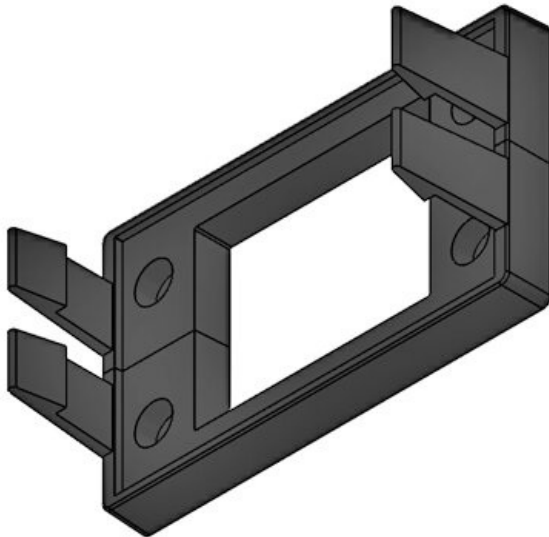

EAN 42062 4251269323 744 10 108 mm 64 mm 38 mm 38 mm

4 5,5 mm KEL 10, KEL-U 10, KEL-FA 10, KEL-QUICK 10

KEL-SNAP-S-B

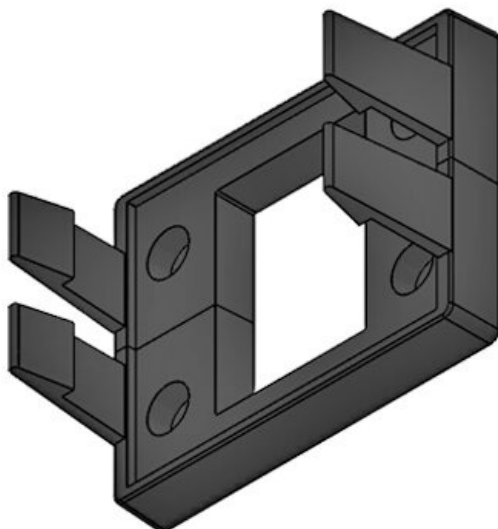

EAN 42063 4251269323 751 10 81 mm 64 mm 38 mm 38 mm

4 5,5 mm KEL-B, KEL-U-B, KEL-QUICK-B

