


# KEL-ULTRA flexibele piramide kabeldoorvoertules

voor enkele kabels met diameters tot 115 mm / IP66 / UL Type 12

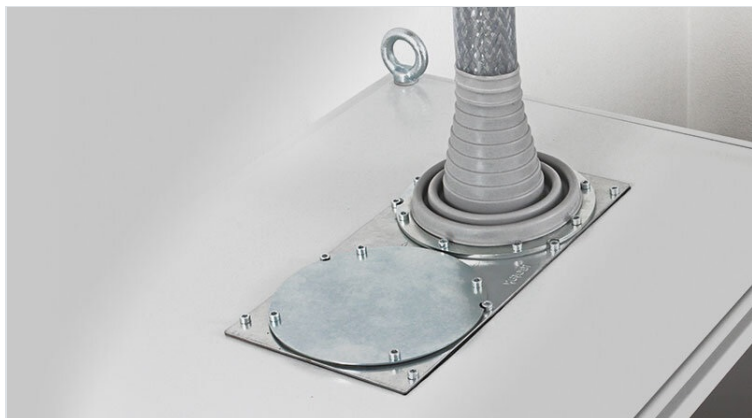

WE  
CONTROL  
COMPONENTS

[Bestel direct online @ CC Nederland »](#)



[Voor aanvragen uit België klik hier »](#)

The KEL-ULTRA flex is designed as a cable entry grommet for any large cable or conduit that is difficult to manage. The KEL-ULTRA flex comes in two sizes and is ideal for routing and sealing cables and conduits with a diameter from 25 to 115 mm. Due to the high flexibility of the elastomer pyramid, inserting large, thick cables with KEL-ULTRA flex is easier than using standard cable glands.

After inserting the cable or conduit, the KEL-ULTRA flex is quickly and easily mounted with the metal ring and screws. This ring enables a circular fixing and sealing of the grommet at the enclosure wall. The ring is supplied with each KEL-ULTRA flex.

Cutting of grommets: Cable diameter less 25%.

It is recommended that additional strain relief be provided for cables using cable ties.

IP54

IP55

IP64

IP65

IP66

UL TYPE  
12



RoHS  
compliant



Made in  
Germany

## Specificaties


|                                    |   |
|------------------------------------|---|
| <b>IP-classificatie (EN 60529)</b> | IP54, IP55, IP64, IP65, IP66                        |
| <b>UL Type (UL 50E)</b>            | UL Type 12  |
| <b>Materiaal</b>                   | Elastomeer<br>Bevestigingsring: Plaatstaal verzinkt |
| <b>Vlam klasse</b>                 | UL94-V0, zelfdovend                                 |
| <b>Temperatuur</b>                 | -40 C° tot 100 C°                                   |
| <b>Eigenschappen</b>               | zonder siliconen, halogeenvrij                      |
| <b>Montage type</b>                | Schroefbevestiging                                  |

## Voordelen


- Het is mogelijk om stugge kabels te monteren onder een hoek
- Beschermingsgraad IP66 (conform EN 60529)

## Producttypes en maten

KEL-ULTRA flex 1

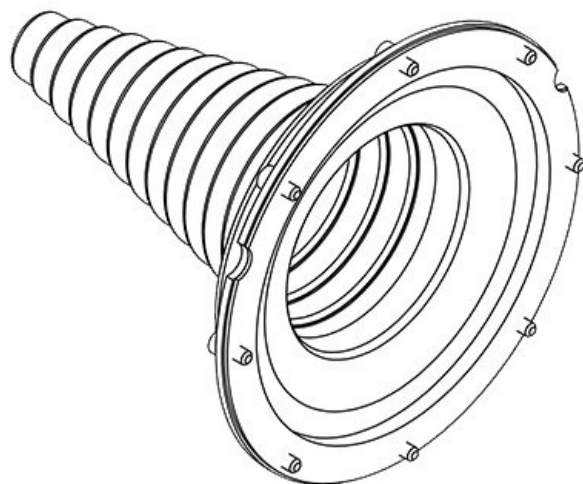

|                    |                   |                           |                    |
|--------------------|-------------------|---------------------------|--------------------|
| Art.nr.            | <b>42630</b>      | Externe diameter          | <b>168 mm</b>      |
| EAN                | <b>4251269309</b> | Inbouwmaat                | <b>140 mm</b>      |
| Aantal             | <b>1</b>          | rond                      |                    |
| Voor aantal kabels | <b>1</b>          | Aantal schroefgaten       | <b>8</b>           |
| Max. kabeldiameter | <b>90 mm</b>      | Diameter van schroefgaten | <b>5,5 mm</b>      |
| Hoogte             | <b>175,5 mm</b>   | Voor                      | <b>1 x 25 - 90</b> |
| Montage hoogte     | <b>175,5 mm</b>   | kabeldiameter             | <b>mm</b>          |
|                    |                   | s                         |                    |

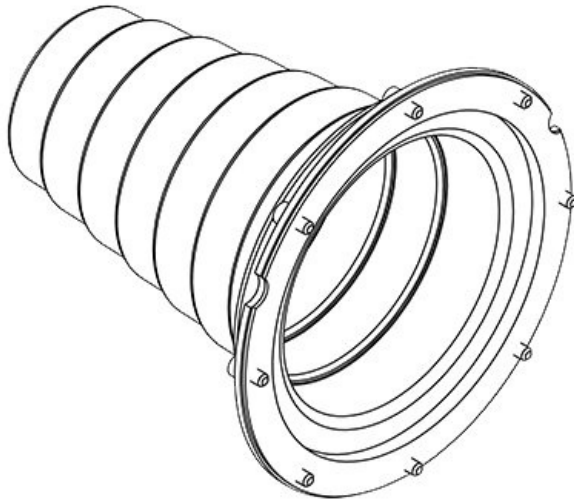

|                    |                   |                           |                        |
|--------------------|-------------------|---------------------------|------------------------|
| Art.nr.            | <b>42631</b>      | Externe diameter          | <b>168 mm</b>          |
| EAN                | <b>4251269309</b> | Inbouwmaat                | <b>140 mm</b>          |
| Aantal kabels      | <b>1</b>          | rond                      |                        |
| Voor aantal kabels | <b>1</b>          | Aantal schroefgaten       | <b>8</b>               |
| Max. kabeldiameter | <b>115 mm</b>     | Diameter van schroefgaten | <b>5,5 mm</b>          |
| Hoogte             | <b>175,5 mm</b>   | Voor kabeldiameter        | <b>1 x 75 - 115 mm</b> |
| Montage hoogte     | <b>175,5 mm</b>   | s                         |                        |